



PVL-B2

Stackable and Stand-alone Inline Valves



PVL-B21 - Stand-alone Series

Stand-alone high flow valves with 10 or 15mm DIN C Pilot Solenoid Valve. Light weight plastic bodies feature push-in or threaded connection.

PVL-B22 - Stackable Series

Stacking high flow valves with 10 or 15mm DIN C Pilot Solenoid Valve. Light weight plastic bodies feature push-in or threaded connection. Stacking valves feature modular inlet and exhaust facility.

- High flow – Compact size with a 18 mm width body
- Push-in fitting diameter 6mm, 8mm or threaded G1/8"
- DIN rail or surface mounting
- Economic clip connector (IP40) or DIN Form C connection (IP65)
- Light weight construction

PVL-B2 Valve Range

18mm width

10mm 24 Vdc Pilot Valve

Economic electrical connection (IP40)



15mm Pilot Valve

Standard DIN form C electrical connection (IP65)



10mm Pilot Valve

Series Overview

15mm Pilot Valve



PVL-B21 : Stand- alone Series – Traditional wiring

Very useful to control isolated cylinders, these stand-alone valve Series are compact and easy to mount on the machines close to the actuator with neat electrical pilot. Available with either 15 or 10 mm pilot solenoid valve traditional wiring, these Series can also be stacked and mixed into a stacking valve island Series



PVL-B22 : Stackable Series – Traditional wiring

The PVL-B2 Series stacking system permits assembly of several valves into one stack. Supply is connected at either a single or a dual head/tail set. Two common exhaust galleries are provided. Connections to outlet ports 2 and 4 on each valve can be accomplished by G1/8" threaded pipe or instant tube fittings, 6 or 8 mm OD. Electrical connection is made to each solenoid using either a 15 mm - 3 pin - 8 mm spacing DIN Form C connector plug or Clip Connector. Each stack assembly can handle any combination of single or double solenoid valves



Compatibility with original PVL-B & PVL-C Series

Issued from the original PVL-B Series, the new PVL-B2 Series can be associated in one configuration mixing PVL-B & PVL-C Valves. For further details on the PVL-B & PVL-C Series, you can refer to the dedicated technical catalogue PDE2628TCUK



PVL-B2

3 Porting options for an optimized flow

2 Electrical Pilot options 10 mm Pilot Solenoid Valve


Pins-UP option



Non locking Manual Override

24 Vdc – Low power (1W)

Economic electrical connection
 by Clip Connector – IP40

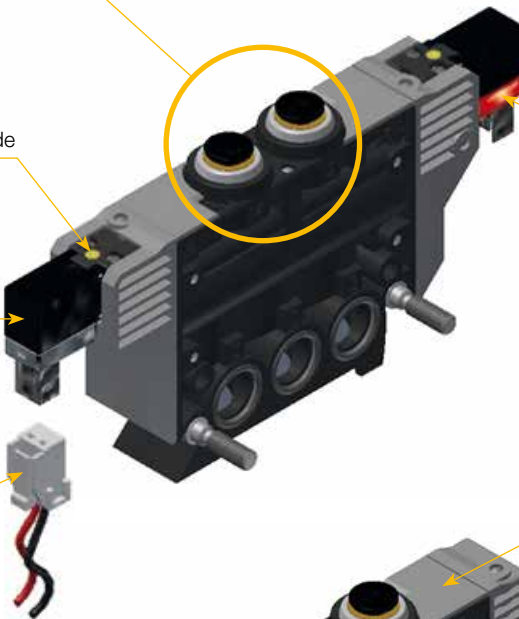

Integrated
 LED Indicator



Pneumatic Symbol

15 mm DIN For C Pilot Solenoid Valve




Standard DIN Form C connectors – IP65
 8 mm spacing



Pins-DOWN option

Wide range of DC and AC Voltage options

5 manual override options



Supply and Exhaust Bottom Ported
 for Stand-alone design



Common Supply and Exhaust Channels
 for stackable design

PVL-B22 - Stackable Series








Stacking high flow valves with 10 or 15mm DIN C Pilot Solenoid Valve. Light weight plastic bodies feature push-in or threaded connection. Stacking valves feature modular inlet and exhaust facility.

- High flow – Compact size with a 18 mm width body
- Push-in fitting diameter 6mm, 8mm or threaded G1/8"
- DIN rail or surface mounting
- Economic clip connector (IP40) or DIN Form C connection (IP65)
- Light weight construction




PVL-B22 - Valve module

Equipped with 10mm - 24 Vdc - 1W pilot solenoid valve – LED Indicator – Pins Down*

Symbol	Description	Pilot Man. Overr.	Connection	W (g)	Order code
		Non-locking flush	Push-in 6mm	165	PVL-B2213062C1
			Push-in 8mm	165	PVL-B2213082C1
			G1/8"	165	PVL-B2213182C1
		Non-locking flush	Push-in 6mm	165	PVL-B2233062C1
			Push-in 8mm	165	PVL-B2233082C1
			G1/8"	165	PVL-B2233182C1
	Dual 3/2 N.C. air spring return	Non-locking flush	Push-in 6mm	210	PVL-B2253062C1
			Push-in 8mm	210	PVL-B2253082C1
			G1/8"	210	PVL-B2253182C1
	5/2 Double acting	Non-locking flush	Push-in 6mm	200	PVL-B2223062C1
			Push-in 8mm	200	PVL-B2223082C1
			G1/8"	200	PVL-B2223182C1
	5/3 Closed center (APB)	Non-locking flush	Push-in 6mm	210	PVL-B2273062C1
			Push-in 8mm	210	PVL-B2273082C1
			G1/8"	210	PVL-B2273182C1
	5/3 Vented center	Non-locking flush	Push-in 6mm	210	PVL-B2283062C1
			Push-in 8mm	210	PVL-B2283082C1
			G1/8"	210	PVL-B2283182C1
	5/3 Pressurised center	Non-locking flush	Push-in 6mm	210	PVL-B2293062C1
			Push-in 8mm	210	PVL-B2293082C1
			G1/8"	210	PVL-B2293182C1










* Other electrical connection orientations or low voltages DC on demand (can be subject to quantity)

10 mm Pilot solenoid valve electrical clip connector

Description	Connector type	Cable length	W (g)	Order code
 <p>Clip-on connector – IP40 Individual : Including 2 flying leads Multiple : Including 1 common (0 Vdc) and 1 flying lead per connector</p>	1 clip connector	1 meter	8	P8LW021C
	2 clip connectors	1 meter	12	P8LW021C02
	4 clip connectors	1 meter	20	P8LW021C04
	8 clip connectors	1 meter	36	P8LW021C08

PVL-B22 - Valve module

Equipped with 15mm DIN Form C (8mm spacing) - 24 Vdc - 1,2W pilot solenoid valve – Pins Up









	Symbol	Description	Pilot Man. Overr.	Connection	W (g)	Order code
		5/2 single acting spring return	Locking flush	Push-in 6mm	165	PVL-B2216062C2
				Push-in 8mm	165	PVL-B2216082C2
				G1/8"	165	PVL-B2216182C2
		5/2 single acting air spring return	Locking flush	Push-in 6mm	165	PVL-B2236062C2
				Push-in 8mm	165	PVL-B2236082C2
				G1/8"	165	PVL-B2236182C2
		Dual 3/2 N.C. air spring return	Locking flush	Push-in 6mm	210	PVL-B2256062C2
				Push-in 8mm	210	PVL-B2256082C2
				G1/8"	210	PVL-B2256182C2
		5/2 Double acting	Non-locking flush	Push-in 6mm	200	PVL-B2226062C1
				Push-in 8mm	200	PVL-B2226082C1
				G1/8"	200	PVL-B2226182C1
		5/3 Closed center (APB)	Locking flush	Push-in 6mm	210	PVL-B2276062C2
				Push-in 8mm	210	PVL-B2276082C2
				G1/8"	210	PVL-B2276182C2
		5/3 Vented center	Locking flush	Push-in 6mm	210	PVL-B2286062C2
				Push-in 8mm	210	PVL-B2286082C2
				G1/8"	210	PVL-B2286182C2
	5/3 Pressurised center	Locking flush	Push-in 6mm	210	PVL-B2296062C2	
			Push-in 8mm	210	PVL-B2296082C2	
			G1/8"	210	PVL-B2296182C2	

For other 15mm pilot valve options (voltage, manual override or pins orientation), valve body and 15mm pilot valve must be ordered separately (see below)

PVL-B22 - Valve module


(Without Pilot solenoid valve – including 2 mounting screws for Pilot solenoid valve)

For use with 15mm DIN Form C (8mm spacing) Pins UP or Pins DOWN pilot solenoid valve





	Symbol	Description	Connection	W (g)	Order code	
		5/2 single acting spring return	Push-in 6mm	125	PVL-B221606	
			Push-in 8mm	125	PVL-B221608	
			G1/8"	125	PVL-B221618	
		5/2 single acting air spring return	Locking flush	Push-in 6mm	125	PVL-B223606
				Push-in 8mm	125	PVL-B223608
				G1/8"	125	PVL-B223618
		Dual 3/2 N.C. air spring return	Locking flush	Push-in 6mm	130	PVL-B225606
				Push-in 8mm	130	PVL-B225608
				G1/8"	130	PVL-B225618
	5/2 Double acting	Non-locking flush	Push-in 6mm	120	PVL-B222606	
			Push-in 8mm	120	PVL-B222608	
			G1/8"	120	PVL-B222618	
	5/3 Closed center (APB)	Locking flush	Push-in 6mm	130	PVL-B227606	
			Push-in 8mm	130	PVL-B227608	
			G1/8"	130	PVL-B227618	
	5/3 Vented center	Locking flush	Push-in 6mm	130	PVL-B228606	
			Push-in 8mm	130	PVL-B228608	
			G1/8"	130	PVL-B228618	
	5/3 Pressurised center	Locking flush	Push-in 6mm	130	PVL-B229606	
			Push-in 8mm	130	PVL-B229608	
			G1/8"	130	PVL-B229618	

15mm DIN Form C (8mm spacing) pilot solenoid valve – Pin's UP or Pin's DOWN – must be ordered separately (Refer to 15 mm pilot valve section)




Head and Tail sets – Intermediate supply modules

	Description	Mounting	Air supply	Port size	W (g)	Order code
	Head and tail set	On DIN rail	Left end	G1/4"	175	PVL-B1719
			Both left and right ends	G1/4"	195	PVL-B1729
	Intermediate module	On surface	Left end	G1/8"	175	PVL-B1818
			Both left and right ends	G1/8"	195	PVL-B1828
Intermediate module	On DIN rail	Up side	G1/8"	150	PVU-LBB118	

Pneumatic accessories

	Description	Size	Orientation	Material	Tube OD	W (g)	Order code
	Push-in fitting for Pressure and Exhaust ports	G1/4"	Straight	Metal	8 mm	16	3101 08 13
					10 mm	18	3101 10 13
					12 mm	27	3101 12 13
			Elbow	Metal/Plastic	8 mm	21	3199 08 13
					10 mm	28	3199 10 13
					12 mm	44	3199 12 13
	Silencer	G1/4"	Straight	Plastic		10	P6M-PAB2
				Sintered metal		20	P6M-BAA2
	Push-in fitting for PVL-B2 Valve	G1/8"	Straight	Metal	4 mm	6	3101 04 10
					6 mm	7	3101 06 10
					8 mm	11	3101 08 10
			Elbow prolonged	Plastic	4 mm	8	3169 04 10
					6 mm	11	3169 06 10
					8 mm	18	3169 08 10
			Elbow short	Plastic	4 mm	6	3199 04 10
					6 mm	6	3199 06 10
					8 mm	9	3199 08 10
		6 mm	Elbow prolonged	Plastic	4 mm	2	3184 04 06
					6 mm	4	3184 06 00
					8 mm	9	3184 08 00
			Elbow short	Plastic	4 mm	3	3182 04 06
					6 mm	1	3182 06 00
					8 mm	7	3184 06 08
			Elbow prolonged	Plastic	6 mm	7	3184 06 08
					8 mm	10	3184 08 00
					8 mm	10	3182 08 00

Spare mounting and assembly kits

	Description	W (g)	Order code
	Sealing kit for supply/exhaust common channels Included :	35	PVL-B1901
	<ul style="list-style-type: none"> • 3 common blanking plugs • 2 drilled and threaded rods • 2 screws for extended tie rod 		
	Pack of 10 common blanking	35	PVL-B1902
	Pack of 10 stacking rods	35	PPR-V21
	Pack of 20 rail clip assembly	70	PPR-L09
	Pack of 30 O-ring seals for supply/exhaust common channels	15	PPR-V23

Mounting on 35 mm DIN Rail

Valve stacks mount quickly and easily to 35 mm DIN rail with the use of a pneumatic head / tail set. The dual head / tail set provides input and exhaust ports at both ends and is recommended if more than 5 valves are to be operated simultaneously.

Surface mounting

For single or dual air supply


This mounting does not use DIN rail and can be directly fixed on the panel. Particularly compact and threaded G1/8", it is recommended for combinations of only a few power valves (maximum 5 valves) since the supply and exhaust common ports 1-3-5 are not G1/4" oversized.

Removal or Replacement


Modules are removed in reverse of the order shown at right. Before removing a module for service or replacement, loosen the pneumatic tail piece.

Mounting Procedure


1 - Clip on and tighten the pneumatic head piece.

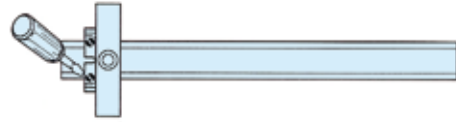


2 - Assemble the two parallel mounting rods using cross rod provided with modules.

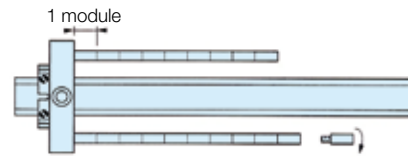


3 - Clip on the pneumatic tail piece. Start screws into mounting rod but leave loose for modules insertion.

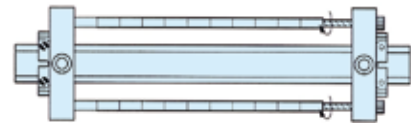

4 - To mount valves, position upper slot then push-lock lower slot. Mount modules (valves, modules, transition pieces, etc...) and press together.

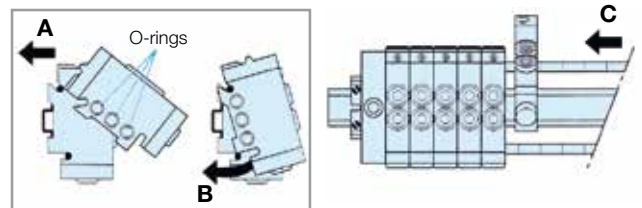


5 - Tighten the assembly.

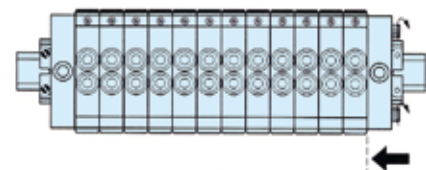

PVL-B21 - Stand-alone Series








Stand-alone high flow valves with 10 or 15mm DIN C Pilot Solenoid Valve. Leight weight plastic bodies feature push-in or threaded connection.

- High flow – Compact size with a 18 mm width body
- Push-in fitting diameter 6mm, 8mm or threaded G1/8"
- Enonomic clip connector (IP40) or DIN Form C connection (IP65)
- Leight weight construction
- Compatible with stackable version

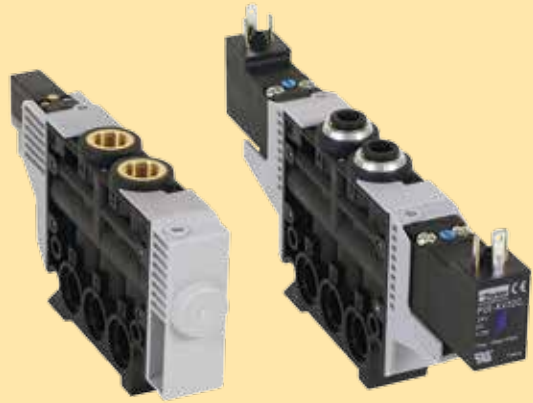


PVL-B21 - Valve module

Equiped with 10mm - 24 Vdc - 1W pilot solenoid valve – LED Indicator – Pins Down*

Symbol	Description	Pilot Man. Overr.	Connection	W (g)	Order code
	5/2 single acting spring return	Non-locking flush	Push-in 6mm	165	PVL-B2113062C1
			Push-in 8mm	165	PVL-B2113082C1
			G1/8"	165	PVL-B2113182C1
	5/2 single acting air spring return	Non-locking flush	Push-in 6mm	165	PVL-B2133062C1
			Push-in 8mm	165	PVL-B2133082C1
			G1/8"	165	PVL-B2133182C1
	Dual 3/2 N.C. air spring return	Non-locking flush	Push-in 6mm	210	PVL-B2153062C1
			Push-in 8mm	210	PVL-B2153082C1
			G1/8"	210	PVL-B2153182C1
	5/2 Double acting	Non-locking flush	Push-in 6mm	200	PVL-B2123062C1
			Push-in 8mm	200	PVL-B2123082C1
			G1/8"	200	PVL-B2123182C1
	5/3 Closed center (APB)	Non-locking flush	Push-in 6mm	210	PVL-B2173062C1
			Push-in 8mm	210	PVL-B2173082C1
			G1/8"	210	PVL-B2173182C1
	5/3 Vented center	Non-locking flush	Push-in 6mm	210	PVL-B2183062C1
			Push-in 8mm	210	PVL-B2183082C1
			G1/8"	210	PVL-B2183182C1
	5/3 Pressurised center	Non-locking flush	Push-in 6mm	210	PVL-B2193062C1
			Push-in 8mm	210	PVL-B2193082C1
			G1/8"	210	PVL-B2193182C1










* Other electrical connection orientations or low voltages DC on demand (can be subject to quantity)

10 mm Pilot solenoid valve electrical clip connector

Description	Connector type	Cable length	W (g)	Order code
 <p>Clip-on connector – IP40 Individual : Including 2 flying leads Multiple : Including 1 common (0 Vdc) and 1 flying lead per connector</p>	1 clip connector	1 meter	8	P8LW021C
	2 clip connectors	1 meter	12	P8LW021C02
	4 clip connectors	1 meter	20	P8LW021C04
	8 clip connectors	1 meter	36	P8LW021C08

PVL-B21 - Valve module

Equipped with 15mm DIN Form C (8mm spacing) - 24 Vdc - 1,2W pilot solenoid valve – Pins Up










Symbol	Description	Pilot Man. Overr.	Connection	W (g)	Order code	
		5/2 single acting spring return	Locking flush	Push-in 6mm	165	PVL-B2116062C2
				Push-in 8mm	165	PVL-B2116082C2
				G1/8"	165	PVL-B2116182C2
		5/2 single acting air spring return	Locking flush	Push-in 6mm	165	PVL-B2136062C2
				Push-in 8mm	165	PVL-B2136082C2
				G1/8"	165	PVL-B2136182C2
		Dual 3/2 N.C. air spring return	Locking flush	Push-in 6mm	210	PVL-B2156062C2
				Push-in 8mm	210	PVL-B2156082C2
				G1/8"	210	PVL-B2156182C2
		5/2 Double acting	Non-locking flush	Push-in 6mm	200	PVL-B2126062C1
				Push-in 8mm	200	PVL-B2126082C1
				G1/8"	200	PVL-B2126182C1
		5/3 Closed center (APB)	Locking flush	Push-in 6mm	210	PVL-B2176062C2
				Push-in 8mm	210	PVL-B2176082C2
				G1/8"	210	PVL-B2176182C2
		5/3 Vented center	Locking flush	Push-in 6mm	210	PVL-B2186062C2
				Push-in 8mm	210	PVL-B2186082C2
				G1/8"	210	PVL-B2186182C2
	5/3 Pressurised center	Locking flush	Push-in 6mm	210	PVL-B2196062C2	
			Push-in 8mm	210	PVL-B2196082C2	
			G1/8"	210	PVL-B2196182C2	

For other 15mm pilot valve options (voltage, manual override or pins orientation), valve body and 15mm pilot valve must be ordered separately (see below)

PVL-B21 - Valve module




(Without Pilot solenoid valve – including 2 mounting screws for Pilot solenoid valve)

For use with 15mm DIN Form C (8mm spacing) Pins UP or Pins DOWN pilot solenoid valve


Symbol	Description	Connection	W (g)	Order code	
		Dual 3/2 N.C. air spring return	Push-in 6mm	130	PVL-B215606
			Push-in 8mm	130	PVL-B215608
			G1/8"	130	PVL-B215618
		5/2 single acting spring return	Push-in 6mm	125	PVL-B211606
			Push-in 8mm	125	PVL-B211608
			G1/8"	125	PVL-B211618
		5/2 single acting air spring return	Push-in 6mm	125	PVL-B213606
			Push-in 8mm	125	PVL-B213608
			G1/8"	125	PVL-B213618
	5/2 Double acting	Push-in 6mm	120	PVL-B212606	
		Push-in 8mm	120	PVL-B212608	
		G1/8"	120	PVL-B212618	
		5/3 Closed center (APB)	Push-in 6mm	130	PVL-B217606
			Push-in 8mm	130	PVL-B217608
			G1/8"	130	PVL-B217618
		5/3 Vented center	Push-in 6mm	130	PVL-B218606
			Push-in 8mm	130	PVL-B218608
			G1/8"	130	PVL-B218618
		5/3 Pressurised center	Push-in 6mm	130	PVL-B219606
			Push-in 8mm	130	PVL-B219608
			G1/8"	130	PVL-B219618

15mm DIN Form C (8mm spacing) pilot solenoid valve – Pin's UP or Pin's DOWN – must be ordered separately (Refer to 15 mm pilot valve section)



Pneumatic accessories

	Description	Size	Orientation	Material	Tube OD	W (g)	Order code		
 <p>3101 ...</p>	Push-in fitting for PVL-B2 Valve	G1/8"	Straight	Metal	4 mm	6	3101 04 10		
					6 mm	7	3101 06 10		
					8 mm	11	3101 08 10		
 <p>3169 ...</p> <p>3199 ...</p>			Elbow prolonged	Plastic	4 mm	8	3169 04 10		
					6 mm	11	3169 06 10		
					8 mm	18	3169 08 10		
					Elbow short	Plastic	4 mm	6	3199 04 10
							6 mm	6	3199 06 10
							8 mm	9	3199 08 10
 <p>3184 ...</p> <p>3182 ...</p>		6 mm	Elbow prolonged	Plastic	4 mm	2	3184 04 06		
					6 mm	4	3184 06 00		
			Elbow short	Plastic	4 mm	3	3182 04 06		
					6 mm	1	3182 06 00		
			8 mm	Elbow prolonged	Plastic	6 mm	7	3184 06 08	
						8 mm	10	3184 08 00	
Elbow short	Plastic	6 mm	7	3182 06 08					
		8 mm	10	3182 08 00					

PVL-B2 – 10 mm pilot solenoid valve options

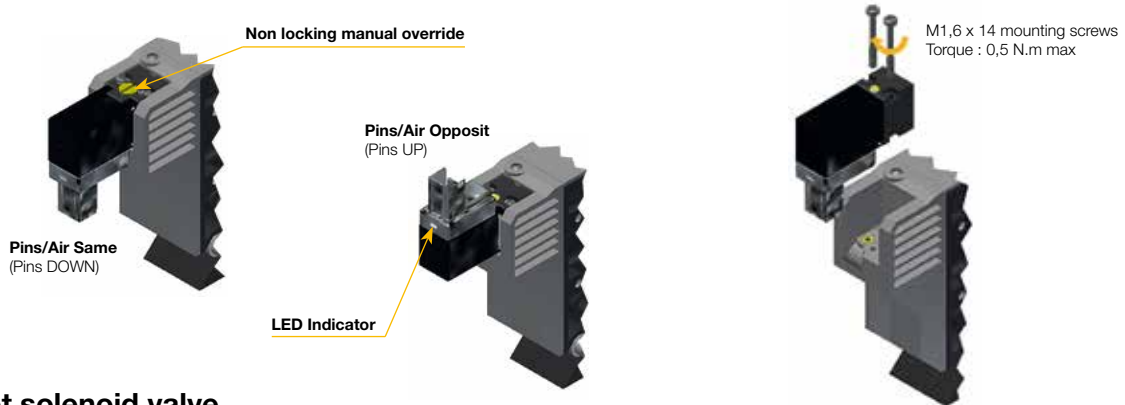


10 mm pilot solenoid valve


	Voltage	Electrical connection orientation	Manual Override	W (g)	Order code
 	24 Vdc	PINs /AIR same (PINs down)	Non-locking flush	20	P2D-KS32C1
		PINs/AIR opposit (PINs UP)	Non-locking flush	20	P2D-KV32C1

Other electrical connection orientations or low voltages DC on demand (can be subject to quantity)

10 mm Pilot solenoid valve electrical clip connector




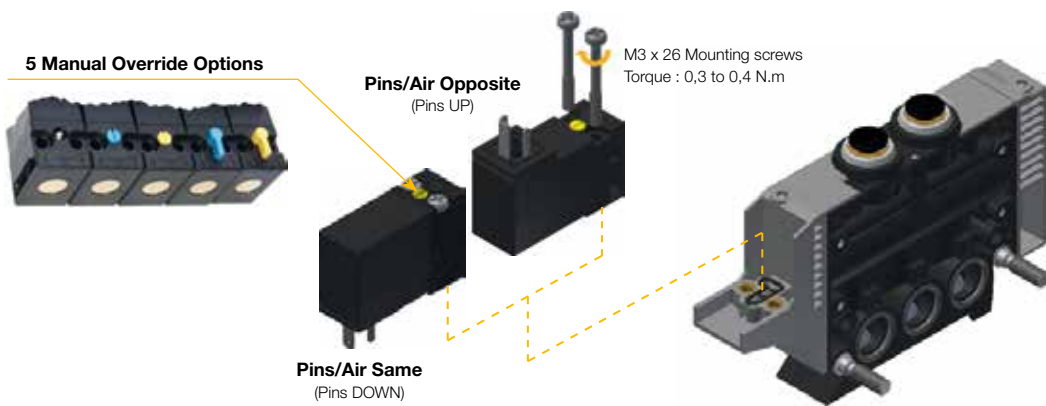















Description	Connector type	Cable length	W (g)	Order code
 <p>Clip-on connector – IP40 Individual : Including 2 flying leads Multiple : Including 1 common (0 Vdc) and 1 flying lead per connector</p>	1 clip connector	1 meter	8	P8LW021C
	2 clip connectors	1 meter	12	P8LW021C02
	4 clip connectors	1 meter	20	P8LW021C04
	8 clip connectors	1 meter	36	P8LW021C08

PVL-B2 – 15 mm pilot solenoid valve options



15mm DIN Form C (8mm spacing) pilot solenoid valve

For use with 15mm pilot solenoid valve PVL-B2 body

	Manual Overrides		Flush (Not Extended)		Extended		
	Without Manual Override	Order code	Blue Override, non locking	Yellow Override, Locking	Blue Override, non locking	Yellow Override, Locking	
 Pins/Air Opposite (Pins UP)	Voltage	W (g)	Order code	Order code	Order code	Order code	
	12 Vdc	38	 P2E-KV32B0	P2E-KV32B1	P2E-KV32B2	P2E-KV32B3	P2E-KV32B4
	24 Vdc	38	 P2E-KV32C0	P2E-KV32C1	P2E-KV32C2	P2E-KV32C3	P2E-KV32C4
	48 Vdc	38	 P2E-KV32D0	P2E-KV32D1	P2E-KV32D2	P2E-KV32D3	P2E-KV32D4
	24 Vac 50Hz	38	 P2E-KV31C0	P2E-KV31C1	P2E-KV31C2	P2E-KV31C3	P2E-KV31C4
	48 Vac 50/60Hz	38	 P2E-KV34D0	P2E-KV34D1	P2E-KV34D2	P2E-KV34D3	P2E-KV34D4
	115 Vac 50Hz	38	 P2E-KV31F0	P2E-KV31F1	P2E-KV31F2	P2E-KV31F3	P2E-KV31F4
	120 Vac 60 Hz	38	 P2E-KV31J0	P2E-KV31J1	P2E-KV31J2	P2E-KV31J3	P2E-KV31J4
	230 Vac 50Hz	38	 P2E-KS32B0	P2E-KS32B1	P2E-KS32B2	P2E-KS32B3	P2E-KS32B4
	240 Vac 60 Hz	38	 P2E-KS32C0	P2E-KS32C1	P2E-KS32C2	P2E-KS32C3	P2E-KS32C4
 Pins/Air Same (Pins DOWN)	12 Vdc	38	 P2E-KS32B0	P2E-KS32B1	P2E-KS32B2	P2E-KS32B3	P2E-KS32B4
	24 Vdc	38	 P2E-KS32C0	P2E-KS32C1	P2E-KS32C2	P2E-KS32C3	P2E-KS32C4
	48 Vdc	38	 P2E-KS32D0	P2E-KS32D1	P2E-KS32D2	P2E-KS32D3	P2E-KS32D4
	24 Vac 50Hz	38	 P2E-KS31C0	P2E-KS31C1	P2E-KS31C2	P2E-KS31C3	P2E-KS31C4
	48 Vac 50/60Hz	38	 P2E-KS34D0	P2E-KS34D1	P2E-KS34D2	P2E-KS34D3	P2E-KS34D4
	115 Vac 50Hz	38	 P2E-KS31F0	P2E-KS31F1	P2E-KS31F2	P2E-KS31F3	P2E-KS31F4
	120 Vac 60 Hz	38	 P2E-KS31J0	P2E-KS31J1	P2E-KS31J2	P2E-KS31J3	P2E-KS31J4
	230 Vac 50Hz	38	 P2E-KS31J0	P2E-KS31J1	P2E-KS31J2	P2E-KS31J3	P2E-KS31J4
	240 Vac 60 Hz	38	 P2E-KS31J0	P2E-KS31J1	P2E-KS31J2	P2E-KS31J3	P2E-KS31J4


Mounting screws included with the valve body

Pilot solenoid valve mounting screw

Description	Size	Material	W (g)	Order code
 Kit of 10 mounting screws	M23 x 26	Steel	20	P2E-KP026PM3



Cable plugs 15 mm - IP65

(8 mm pin spacing)


Description	Electrical protection	Cable length	W (g)	Order code
 Standard screw	No protection	No cable	11	P8C-D
		2 meter	97	P8L-C2
		5 meter	228	P8L-C5
	LED + Protection 24 VDC	No cable	11	P8C-D26C
	LED + Protection 24 VDC/AC	2 meter	97	P8L-C226C
		5 meter	229	P8L-C526C

Suppressor and LED indicators


For 8 mm solenoid pin spacing - For mounting between the solenoid valve and the cable plug

Symbol	Description	Pneumatic connection	W (g)	Order code
 	LED indicator	24 VAC/DC	3	P8V-CR26C
		115 VAC 50 Hz - 120 VAC 60 Hz	3	P8V-CR24F
		230 VAC 50 Hz - 240 VAC 60 Hz	3	P8V-CR24J


PVL-B21 (Stand-alone) & PVL-B22 (Stackable) – with 15 mm pilot solenoid valve – Pins UP

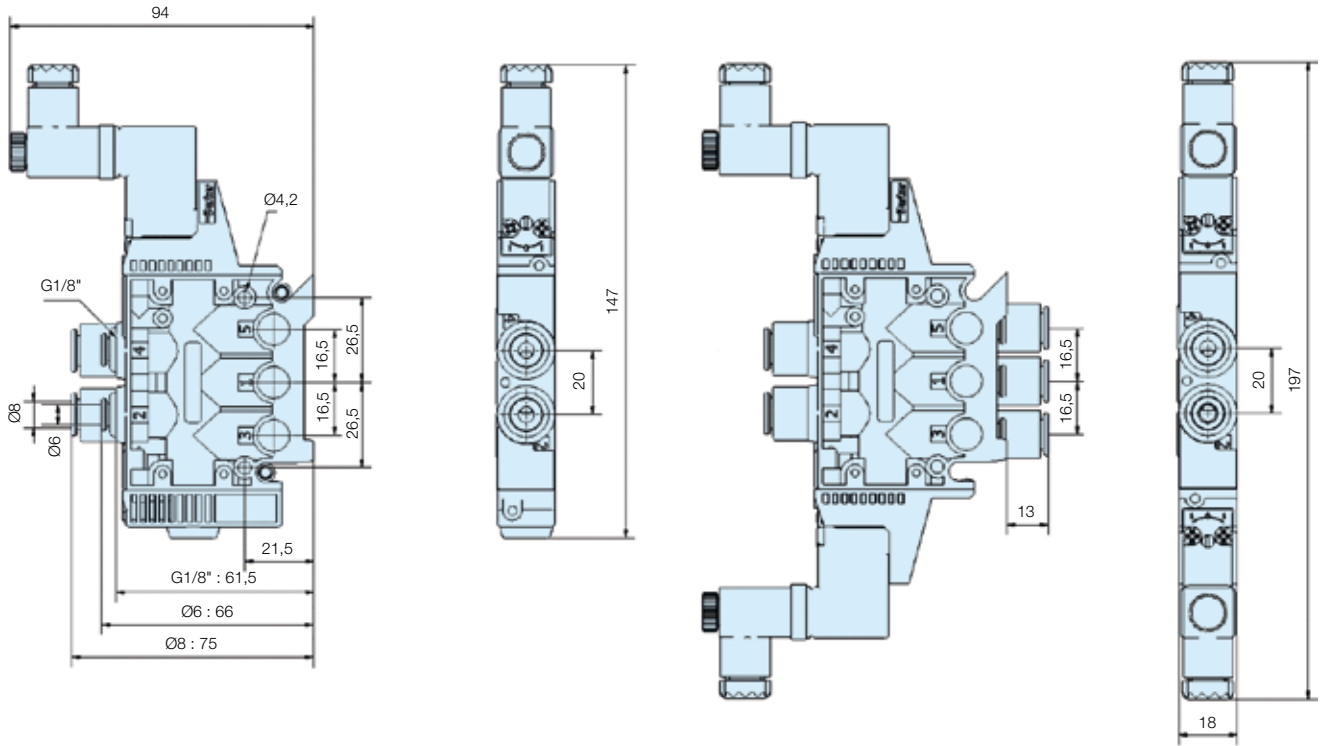


PVL-B21 (Stand-alone) & PVL-B22 (Stackable) – with 15 mm pilot solenoid valve – Pins DOWN

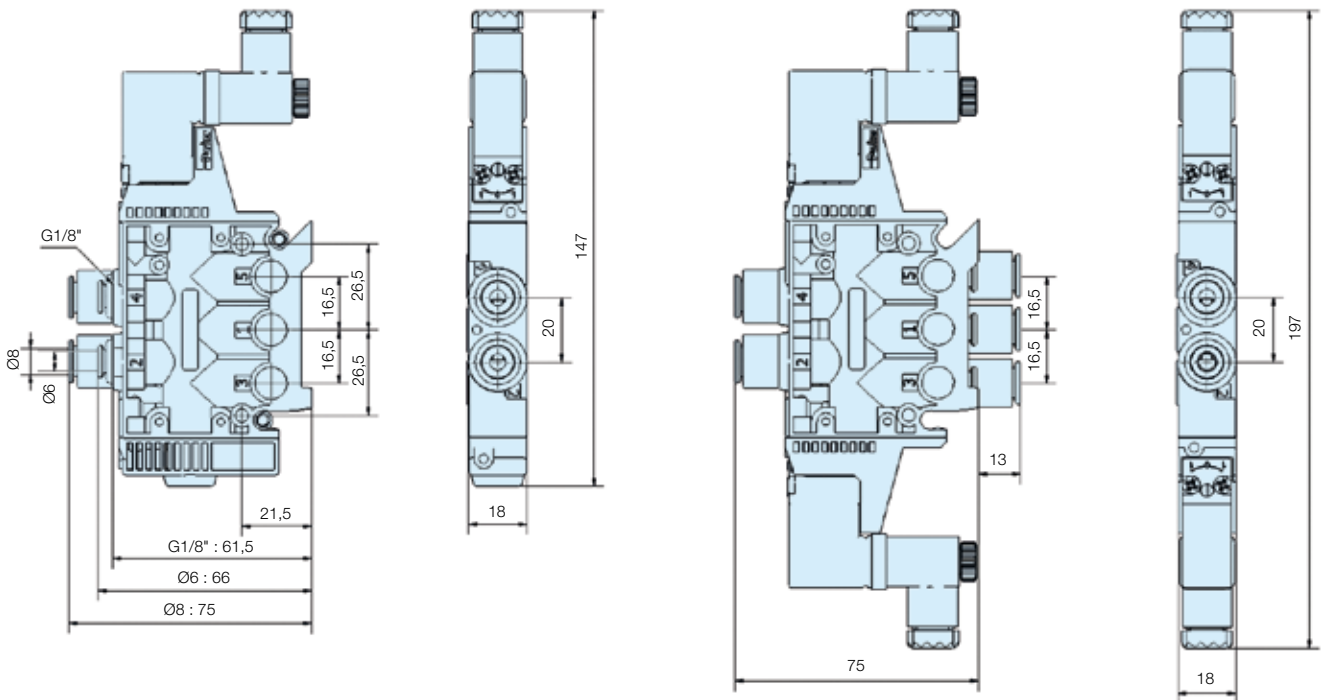

PVL-B21 (Stand-alone) & PVL-B22 (Stackable) – with 10 mm pilot solenoid valve – Pins DOWN

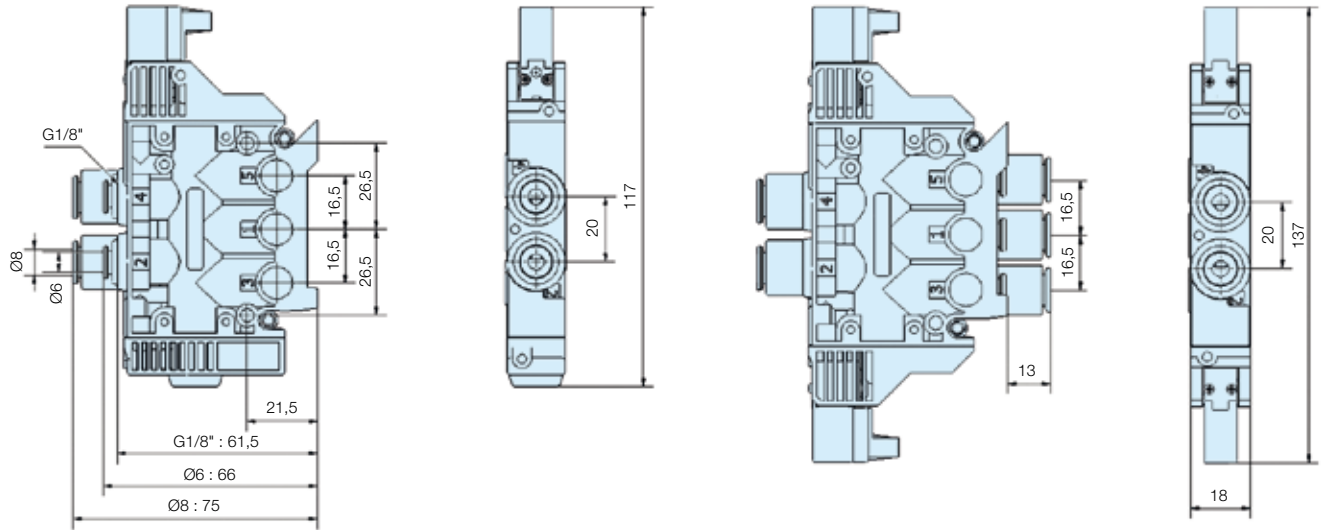


PVL-B21 (Stand-alone) & PVL-B22 (Stackable) – with 10 mm pilot solenoid valve – Pins UP

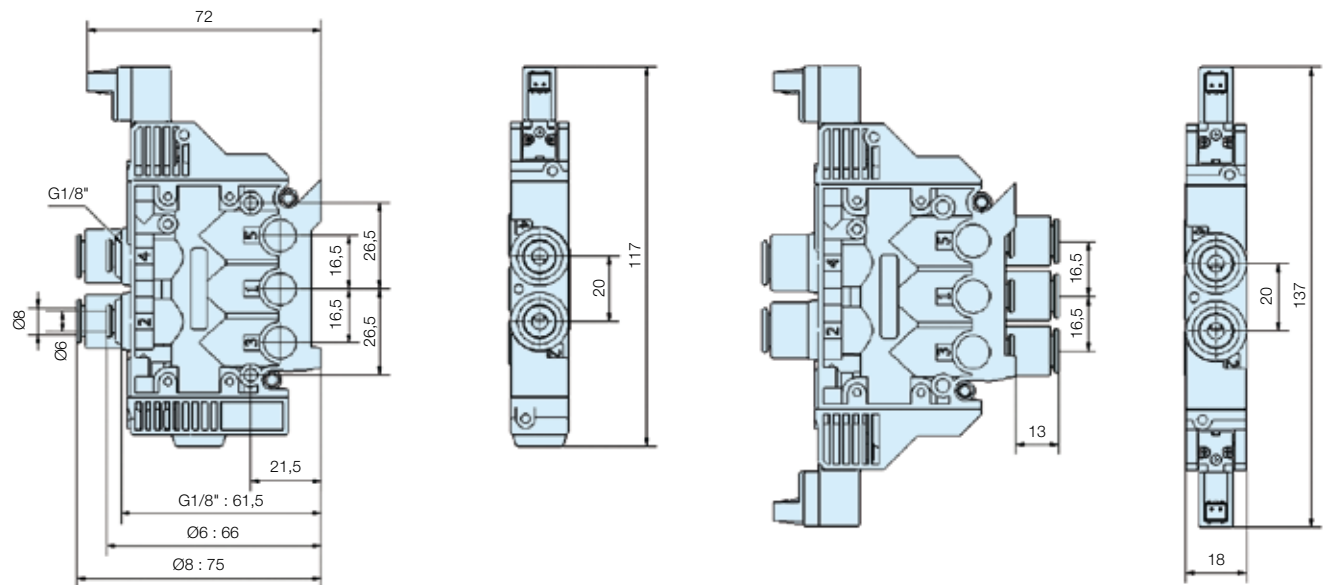


PVL-B22 (Stackable) – Head and Tail sets – DIN rail mounting

Single air supply – PVL-B1719

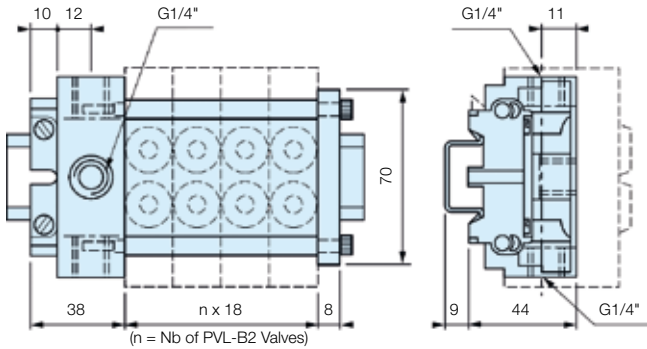


Dual air supply – PVL-B1729

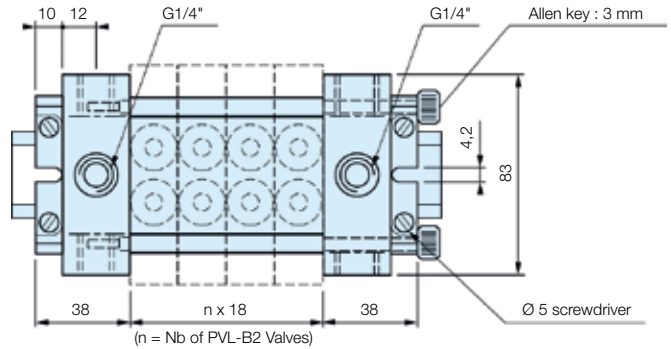


PVL-B22 (Stackable) – Head and Tail sets – Surface mounting

Single air supply – PVL-B1818

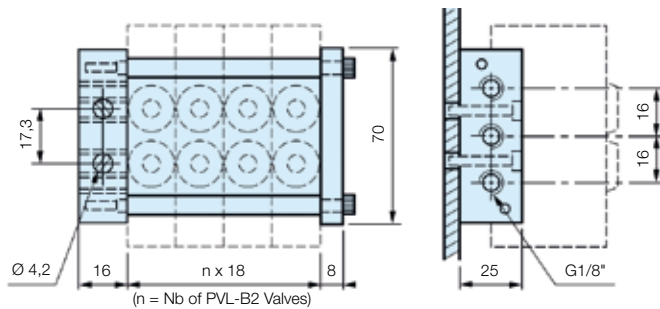

Dual air supply – PVL-B1828

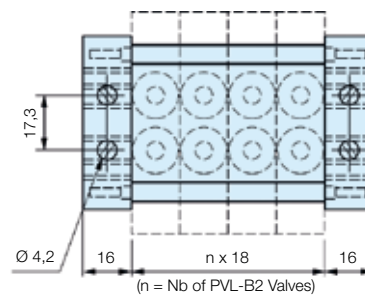

PVL-B22 (Stackable) – Intermediate supply module – PVU-LBB118

